



# A42 Bellows Foot Pump

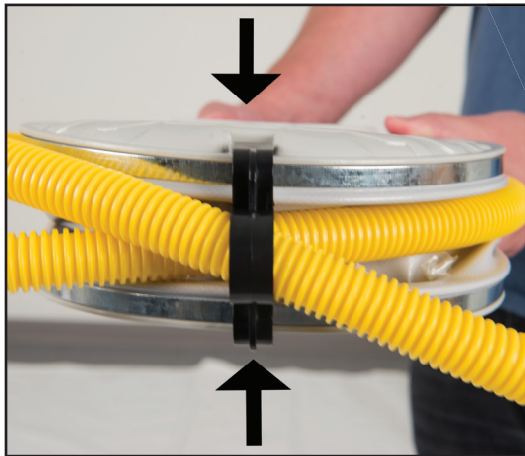


Push down on the top & bottom of the pump to release the black clip and unravel the hose.

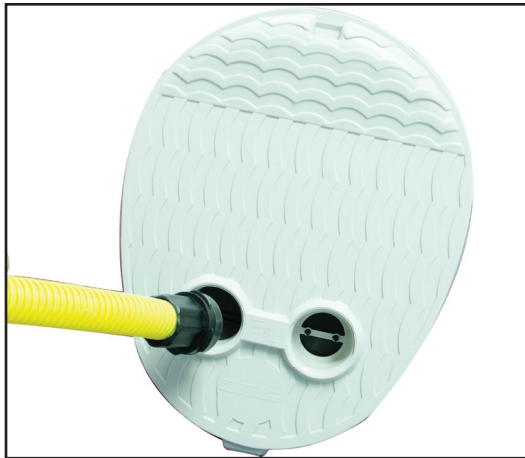

Insert the hose into the "INFLATE" port on the foot pump.

**Note:** Use the "DEFLATE" port when you need to pack your kayak down as compact as possible.

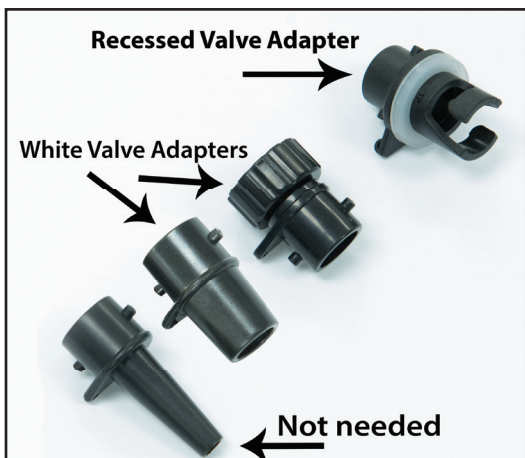

Four adapters are included. The Recessed Valve Adapter inflates the Explorers, FastTracks, PaddleSki, Pontoon Boats and Transom Boats. Either of the two White Valve Adapters work with Sport Kayaks, Motormount Boats and inflatable seats.

SEA EAGLE<sup>®</sup>.com




Insert the proper adapter into the end of the hose and lock into place.

**Note:** Valves can be left attached to the tether or removed. If more than 1 adapter is needed, it is best to keep them tethered to the pump.

Recessed Valve Adapter: Fits over the Recessed Valve stem.

Wide End Adapter: sits inside the white valve.

Twist Cap Adapter: twist onto the white valve like a bottle top.

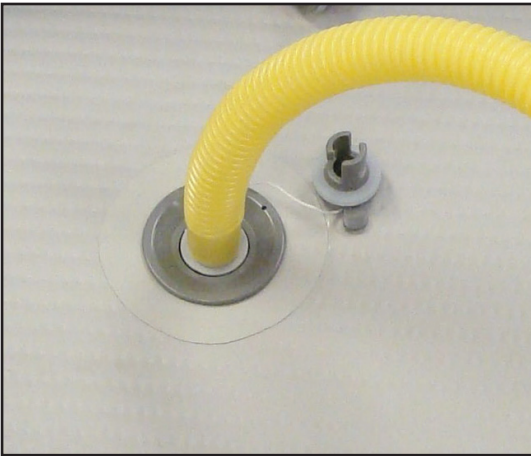

Insert the recessed valve adapter into the CLOSED valve (stem in the UP position) and turn to the right until fully seated. Inflate to proper working pressure (3.2 psi).



Open the cap of the white valve and twist on or insert the adapter. Pump until proper working pressure (1.1 psi) is met or resistance is felt when inflating the tubes or the seat is comfortably firm. Tighten valves firmly to avoid deflation. (Twist adapter shown.)

SEA EAGLE<sup>®</sup>.com